



Standard pneumatic tyre

Our standard pneumatic tyre provides good traction, stability and control on any surface. The reinforced sidewalls protect the tyre from lateral cuts, punctures and other breakdowns, while increasing the overall tyre and rim life. This tyre is the perfect pneumatic forklift tyre at an affordable price.



3,5



GENERAL
PERFORMANCE

3,5



DURABILITY

4,5



COMFORT

3,5



ENERGY SAVINGS

OUR PRODUCT RANGE

Tyre size	Ply rating	Tread pattern	Outside diameter (mm)	Section width (mm)	Weight (kg)	Load capacity (kg) 25 km/h	
			± 5 mm	± 5 mm		Drive wheel	Steering wheel
4.00-8	8	P01	415	112	4	900	770
5.00-8	10	P01	469	131	7	1000	1090
15x4½-8 (125/75-8)	12	P01	385	122	4,8	1000	800
18x7-8 (180/70-8)	14	P01	465	173	9	900	1610
6.00-9	10	P01	545	160	11	860	1515
21x8-9 (200/75-9)	16	P01	533	203	12	900	1950
6.50-10	10	P01	597	178	12	790	1725
6.50-10	12	P01	597	178	12,2	900	1935
23x9-10 (225/75-10)	20	P01	584	229	17	1000	2650
4.50-12	8	P01	548	122	8	900	1175
7.00-12	12	P01	683	192	18,5	860	2445
7.00-12	14	P01	683	192	18,5	1000	2670
8.25-12	12	P01	765	235	21	720	3060
23x10-12 (250/60-12)	12	P01	597	254	17	700	2650
27x10-12 (250/75-12)	14	P01	682	254	22	700	2725
23x5	10	P01	635	144	12	775	1500
5.50-15	8	P01	670	157	13	720	1670
6.00-15	10	P01	705	170	15	830	2185
7.00-15	12	P01	750	200	22	860	2870
7.50-15	14	P01	808	215	24	790	3140
28x9-15 (8.15-15 / 225-75-15)	14	P01	706	221	23	970	3075
250-15 (250/70-15)	16	P01	735	250	24	930	3855
250-15 (250/70-15)	20	P01	735	250	25	1080	4400
8.25-15	14	P01	847	236	32	830	3830
300-15 (315/70-15)	20	P01	840	300	39	930	5940
7.50-16	12	P01	834	215	45	790	3195
9.00-20	14	P01	1038	259	47	760	5195
10.00-20	16	P01	1073	278	61	790	6085
11.00-20	18	P01	1105	293	78	910	3650
12.00-20	18	P01	1146	315	76	900	8360

TREAD PATTERN

P01




LOOK UP THE **CORRECT REFERENCE** AND ORDER YOUR TYRES

Tyre size	Ply rating	Standard tyre
		REF
4.00-8	8	129TA6979
5.00-8	10	129TA6980
15x4½-8 (125/75-8)	12	129TA6981
18x7-8 (180/70-8)	14	129TA6983
6.00-9	10	129TA6984
21x8-9 (200/75-9)	16	129TA6985
6.50-10	10	129TA6986
6.50-10	12	129TA6987
23x9-10 (225/75-10)	20	129TA6988
4.50-12	8	129TA6990
7.00-12	12	129TA6991
7.00-12	14	129TA6992
8.25-12	12	129TA6993
23x10-12 (250/60-12)	12	129TA6994
27x10-12 (250/75-12)	14	129TA6995
23x5	10	129TA6996
5.50-15	8	129TA6997
6.00-15	10	129TA6998
7.00-15	12	129TA6999
7.50-15	14	129TA7000
28x9-15 (8.15-15 / 225-75-15)	14	129TA7001
250-15 (250/70-15)	16	129TA7002
250-15 (250/70-15)	20	129TA7003
8.25-15	14	129TA7004
300-15 (315/70-15)	20	129TA7005
7.50-16	12	129TA7008
9.00-20	14	129TA7011
10.00-20	16	129TA7012
11.00-20	18	129TA7013
12.00-20	18	129TA7014

Didn't find the tyre you need? Contact us and we will help you out!

RECOMMENDED USE

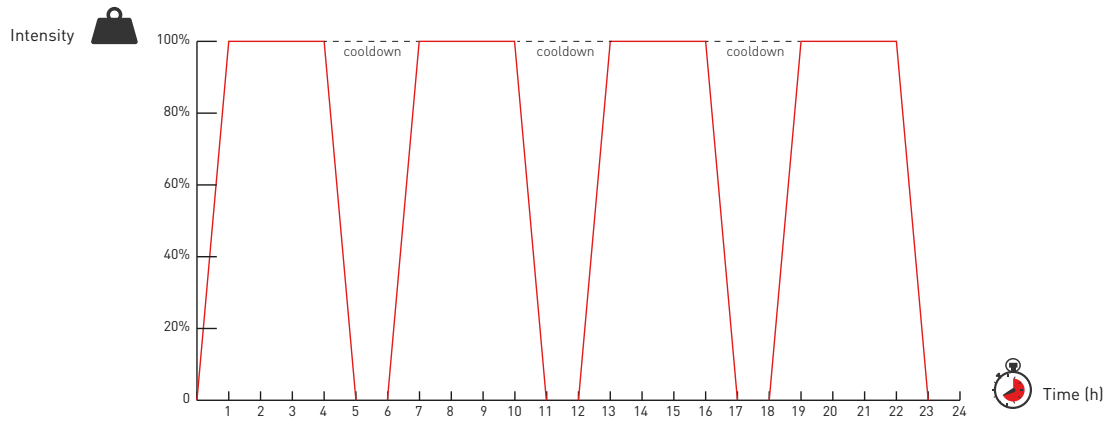

BENEFITS OF THIS TYPE OF TYRE

Good, natural rubber compound
Provides strong resistance to wear.



Firm, modern tread design
Good traction on any surface.


Small, reinforced sidewall
Protects your tyre and the rim from damage from side-on impacts.

WE CAN OFFER YOU A **COMPLETE RANGE OF RIMS** SUITED FOR EACH TYRE



- Split rims
- Multiple piece rim with rings
- Clamp fitting rims
- Drop centre rim

Authorized distributor:



© 07-2019 · TVH Parts Holding NV, Brabantstraat 15, B-8790 Waregem. All rights reserved. No part of this publication may be reproduced or communicated in any form or by any means, electronic or mechanical, including copying, recording or use in an information storage or retrieval system, without prior and explicit permission of TVH Parts Holding NV. TVH® is a registered trademark. All other trademarks or tradenames in this publication are the property of their respective owners. Photographs are included for reference purposes only. All sales are subject to the general terms & conditions of sale on www.tvh.com/avv. REF 46038676



TVH PARTS NV

Brabantstraat 15 · 8790 Waregem · Belgium

T +32 56 43 42 11 · F +32 56 43 44 88 · info@tvh.com · www.tvh.com