TotalSource Standard solid tyre

Our standard solid tyre offers great reliability for general use. Its wide profile and flat footprint is designed to maximise the tyre life. Equipped with large tread blocks and deep lugs, it offers the best traction possible while also delivering maximum stability.

GENERAL PERFORMANCE	DURABILITY	COMFORT	ENERGY SAVINGS
4	4	3,5	3,5

OUR PRODUCT RANGE

Tyre size	Rim size	Tread pattern	Mounting type		Outside diameter (mm)	Section width (mm)	Weight (kg)	Load capacity (kg) 25 km/h	
			Std	Clip	± 5 mm	± 5 mm		Drive wheel	Steering wheel
4.00-8	3.00	TO1	●		401	116	11,3	950	730
4.00-8	3.00	TO3	●		401	116	11,3	950	730
4.00-8	3.75	TO3	●		401	116	11,3	950	730
5.00-8	3.00	TO1	●	●	457	125	17,3	1415	1090
15x4½-8 (125/75-8)	3.00	TO1	●	●	379	112	10,3	1040	800
16x6-8 (150/75-8)	4.33	TO1	●	●	407	147	15,5	1495	1150
18x7-8 (180/70-8)	4.33	TO1	●	●	454	147	21,2	2145	1650
140/55-9	4.00	TO3		●	379	130	10,5	1170	900
6.00-9	4.00	TO1	●	●	522	144	27,2	1885	1450
21x8-9 (200/75-9)	6.00	TO1	●	●	524	186	35,3	2755	2120
6.50-10	5.00	TO1	●	●	572	157	36,3	2340	1800
200/50-10	6.50	TO1	●	●	461	194	23,8	2470	1900
23x9-10 (225/75-10)	6.50	TO1	●	●	576	212	47,3	3445	2650
4.50-12	3.00	TO2	●		546	120	22,2	1460	1080
7.00-12	5.00	TO1	●	●	653	169	48	2920	2240
8.25-12	5.00	TO2	●		731	206	76,5	2995	2245
23x10-12 (250/60-12)	8.00	TO1	●	●	586	234	50,4	3770	2900
27x10-12 (250/75-12)	8.00	TO1	●	●	688	244	71,5	3900	3000
5.50-15	4.50	TO2	●		665	154	37	2430	1870
6.00-15	4.50	TO2	●		697	148	47,2	2455	1820
7.00-15	5.50	TO1	●	●	729	179	61,3	3545	2725
7.50-15	6.50	TO2	●		766	200	76,2	3190	2395
28x9-15 (8.15-15 / 225/75-15)	7.00	TO1	●	●	685	208	59,2	3770	2900
250-15 (250/70-15)	7.00	TO1	●	●	713	222	67,6	4750	3650
8.25-15	6.50	TO1	●	●	815	211	92,7	4750	3650
300-15 (315/70-15)	8.00	TO1	●	●	820	247	116,1	5850	4500
28x12½-15 (355/45-15)	9.75	TO2		●	705	290	91,9	5525	4250
355/65-15	9.75	TO2	●	●	809	302	125	7800	6000
7.50-16	5.50	TO2	●		794	210	77,1	3965	3050
9.00-20	7.00	TO2	●		974	224	123,9	5400	4500
10.00-20	8.00	TO1	●		1033	248	173	6945	5210
12.00-20	8.00	TO1	●		1103	285	231	7320	6100
12.00-20	8.50	TO1	●		1103	285	231	7320	6100

TREAD PATTERN

TO1

TO2

TO3

LOOK UP THE CORRECT REFERENCE AND ORDER YOUR TYRES

Tyre size	Rim size	Standard tyre	Clip tyre	Standard tyre Non-marking	Clip tyre Non-marking
		REF	REF	REF	REF
4.00-8	3.00	142TA3483		142TA3484	
4.00-8	3.00	129TA6776		129TA6825	
4.00-8	3.75	129TA6778		129TA6827	
5.00-8	3.00	142TA3485	142TA3486	142TA3488	142TA3487
15x4½-8 (125/75-8)	3.00	142TA3438	142TA3439	142TA3441	142TA3440
16x6-8 (150/75-8)	4.33	142TA3442	142TA3443	142TA3445	142TA3444
18x7-8 (180/70-8)	4.33	142TA3446	142TA3447	142TA3449	142TA3448
140/55-9	4.00		142TA3436		142TA3437
6.00-9	4.00	142TA3490	142TA3491	142TA3493	142TA3492
21x8-9 (200/75-9)	6.00	142TA3454	142TA3455	142TA3457	142TA3456
6.50-10	5.00	142TA3494	142TA3495	142TA3497	142TA3496
200/50-10	6.50	142TA3450	142TA3451	142TA3453	142TA3452
23x9-10 (225/75-10)	6.50	142TA3462	142TA3463	142TA3465	142TA3464
4.50-12	3.00	129TA6782			
7.00-12	5.00	142TA3498	142TA3499	142TA3501	142TA3500
8.25-12	5.00	129TA6783			
23x10-12 (250/60-12)	8.00	142TA3458	142TA3459	142TA3461	142TA3460
27x10-12 (250/75-12)	8.00	142TA3469	142TA3470		142TA3471
5.50-15	4.50	142TA3489			
6.00-15	4.50	129TA6786		129TA6844	
7.00-15	5.50	142TA3502	142TA3503		142TA3504
7.50-15	6.50	129TA6788			
28x9-15 (8.15-15 / 225/75-15)	7.00	142TA3473	142TA3474	142TA3476	142TA3475
250-15 (250/70-15)	7.00	142TA3466	142TA3467		142TA3468
8.25-15	6.50	142TA3506	142TA3507	142TA3509	142TA3508
300-15 (315/70-15)	8.00	142TA3477	142TA3478	142TA3480	142TA3479
28x12½-15 (355/45-15)	9.75		142TA3472		
355/65-15	9.75	142TA3481	142TA3482		
7.50-16	5.50	142TA3505			
9.00-20	7.00	142TA3510			
10.00-20	8.00	129TA6799			
12.00-20	8.00	129TA6801			
12.00-20	8.50	129TA6802			

Didn't find the tyre you need? Contact us and we will help you out!

NON-MARKING TYRE

Keep your workfloors clean and eliminate floor marking

RECOMMENDED USE

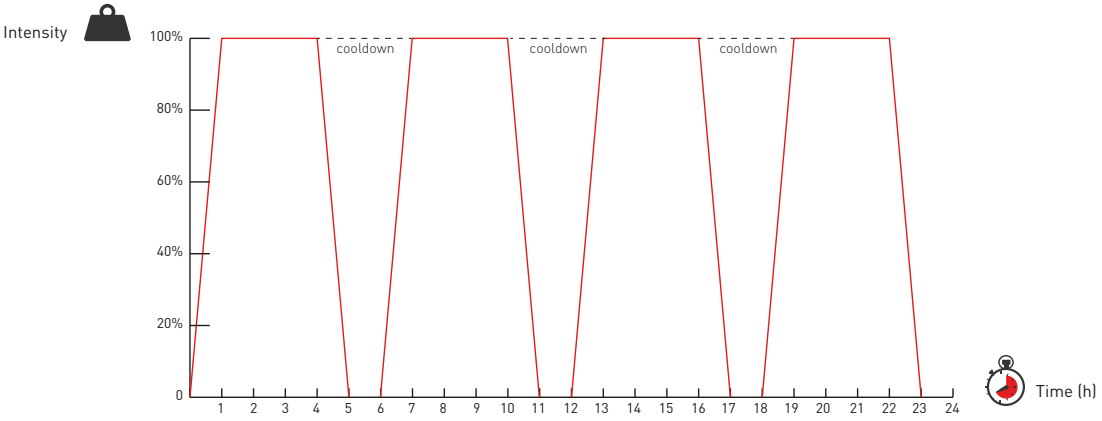

BENEFITS OF THIS TYPE OF TYRE

Equipped with a 60-J line
Ensures you get the most use possible out of your tyre.

A wide tread profile and flat footprint
Economical running, high safety and comfortable when in operation.

Three-layer tyre produced with premium materials
Stands up to wear and tear for longer. Your tyre suffers less from heat fatigue.

WE CAN OFFER YOU A COMPLETE RANGE OF RIMS SUITED FOR EACH TYRE

- Split rims
- Multiple piece rim with rings
- Clamp fitting rims
- Drop centre rim

Authorized distributor:

© 07-2019 · TVH Parts Holding NV, Brabantstraat 15, B-8790 Waregem. All rights reserved. No part of this publication may be reproduced or communicated in any form or by any means, electronic or mechanical, including copying, recording or use in an information storage or retrieval system, without prior and explicit permission of TVH Parts Holding NV. TVH® and TotalSource® are registered trademarks. All other trademarks or tradenames in this publication are the property of their respective owners. Photographs are included for reference purposes only. All sales are subject to the general terms & conditions of sale on www.tvh.com/avv. · REF 46038678

TVH PARTS NV
Brabantstraat 15 · 8790 Waregem · Belgium
T +32 56 43 42 11 · F +32 56 43 44 88 · info@tvh.com · www.tvh.com